


# SunSquare® canvas with Soltis 92



**Soltis 92-2044 white**

(border)

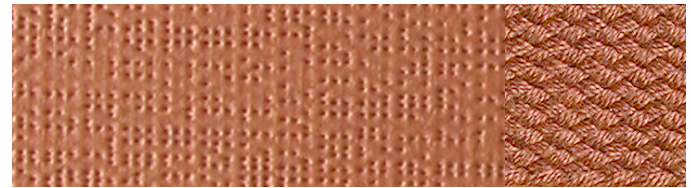


**Soltis 92-2088 copper metalisé**

(border)



**Soltis 92-2001 semi-white**

(border)

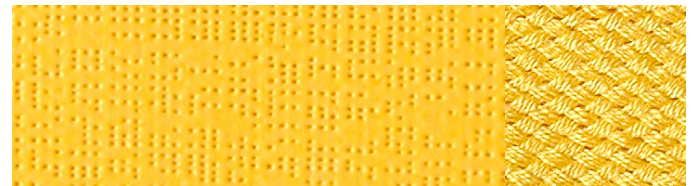

**Soltis 92-2024 yellow**

(border)




**Soltis 92-2002 beige**

(border)




**Soltis 92-2027 red**

(border)

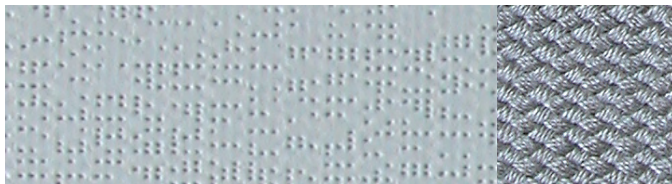

**Soltis 92-2011 light grey**

(border)

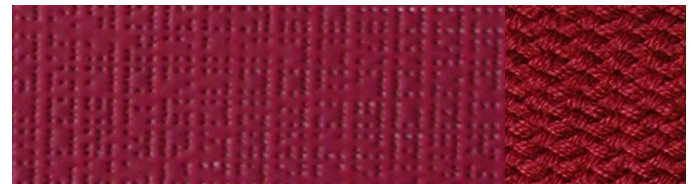

**Soltis 92-2042 bordeaux red**

(border)



**Soltis 92-2048 silver metalisé / silver metalisé**

(border)



**Soltis 92-2030 marine blue**

(border)




**Soltis 92-2046 silver metalisé / semi-white**

(border)



**Soltis 92-2035 green**

(border)

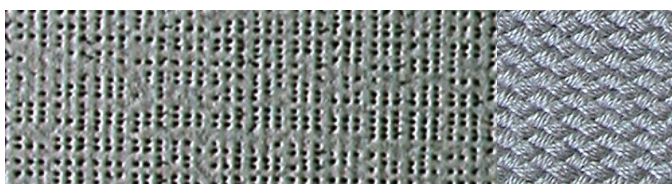

**Soltis 92-2045 dark silver / dark silver**

(border)



**Soltis 92-2053 anthracite-black**

(border)

specifications	Soltis92	norm
weight	420g/m <sup>2</sup>	EN ISO 2286-2
thickness	0,45mm	
Reisskraft (Kette/Schuss)	310/210 daN/5cm	EN ISO 1421
Weiterreisskraft	40/20 daN	
fire resistance	M1 (NFP 92.503) - B1 (DIN4102) - BS7837 M1 UNE23727-90 - ÖNORM B 3800 - Klasse 1 CSE 3/77 SN 198 898 - NFPA 701 - T19 - UBC 31-1 ASTM E 84-95 AS 1530	
quality assurance		ISO 9000

canvas item	A: energy- transmission in %	B: energy- reflection in %	C: energy- absorption in %	total energy A+B+C = 100%	visible light spektrum in %	sunprotection- faktor measured "over glass"	sunprotection faktor measured "unter glass"
<b>Soltis 92-2044 white</b>	18	66	16	=100	12	0,20	0,31
<b>Soltis 92-2001 semi-white</b>	17	66	17	=100	9	0,19	0,31
<b>Soltis 92-2002 beige</b>	10	55	35	=100	6	0,14	0,37
<b>Soltis 92-2011 light grey</b>	7	42	51	=100	5	0,13	0,45
<b>Soltis 92-2048 silvermetalisé / silvermetalisé</b>	6	40	54	=100	5	0,12	0,46
<b>Soltis 92-2046 silvermetalisé / semi-white</b>	7	40	53	=100	5	0,13	0,47
<b>Soltis 92-2045 dark silver / dark silver</b>	5	29	66	=100	6	0,13	0,54
<b>Soltis 92-2088 copper metalisé</b>	7	40	53	=100	5	0,13	0,47
<b>Soltis 92-2024 yellow</b>	19	61	20	=100	10	0,22	0,35
<b>Soltis 92-2027 red</b>	14	51	35	=100	5	0,18	0,41
<b>Soltis 92-2042 bordeaux red</b>	11	38	51	=100	2	0,17	0,49
<b>Soltis 92-2030 marine blue</b>	7	26	67	=100	4	0,15	0,56
<b>Soltis 92-2035 green</b>	5	22	73	=100	4	0,14	0,58
<b>Soltis 92-2053 anthracite-black</b>	4	4	92	=100	4	0,15	0,71